Ordering number : EN3440
查询2SK1053供应商

SANYO

No.3440

2SK1053

N-Channel MOS Silicon FET

Very High-Speed Switching Applications

Features

- Low ON-state resistance.
- Very high-speed switching.

Absolute Maximum Ratings at Ta = 25°C

				unit
Drain to Source Voltage	V_{DSS}		450	V
Gate to Source Voltage	V_{GSS}		±30	V
Drain Current(DC)	I_D		1.0	A
Drain Current(Pulse)	I_{DP}	PW≦10μs, duty cycle≦1%	4.0	A
Allowable Power Dissipation	P_D	Tc=25°C	40	W
			1.75	W
Channel Temperature	Tch		150	°C
Storage Temperature	Tstg		−55 to +150	°C

Electrical Characteristics at Ta = 25°C

			min	typ	max	unit
D-S Breakdown Voltage	$V_{(BR)DSS}$	I_D=1mA, V_{GS}=0	450			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=450V, V_{GS}=0			1.0	mA
Gate to Source Leakage Current	I_{GSS}	V_{GS}=±30V, V_{DS}=0			±100	nA
Cutoff Voltage	$V_{GS(off)}$	V_{DS}=10V, I_D=1mA	2.0		3.0	V
Forward Transfer Admittance	$\|Y_{fs}\|$	V_{DS}=10V, I_D=0.5A	0.6	1.2		S
Static Drain to Source on State Resistance	$R_{DS(on)}$	I_D=0.5A, V_{GS}=10V		3.5	4.5	Ω
Input Capacitance	Ciss	V_{DS}=20V, f=1MHz		250		pF
Output Capacitance	Coss	V_{DS}=20V, f=1MHz		40		pF
Reverse Transfer Capacitance	Crss	V_{DS}=20V, f=1MHz		8.0		pF
Turn-ON Delay Time	$t_{d(on)}$	I_D=0.5A, V_{GS}=10V, V_{DD}=200V, R_{GS}=50Ω		10		ns
Rise Time	t_r			9		ns
Turn-OFF Delay Time	$t_{d(off)}$			45		ns
Fall Time	t_f			50		ns
Diode Forward Voltage	V_{SD}	I_S=1.0A, V_{GS}=0			1.8	V

(Note) Be careful in handling the 2SK1053 because it has no protection diode between gate and source.

Switching Time Test Circuit

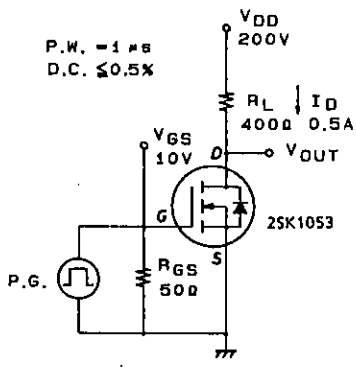

Package Dimensions 2052B

(unit : mm)

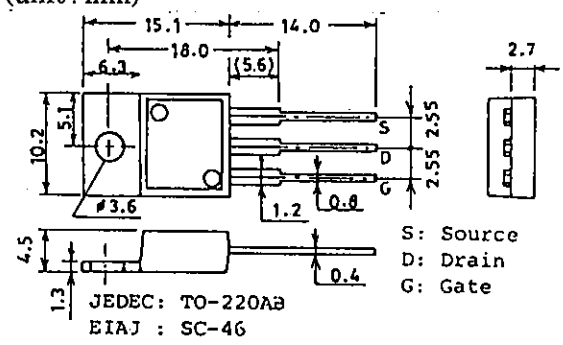

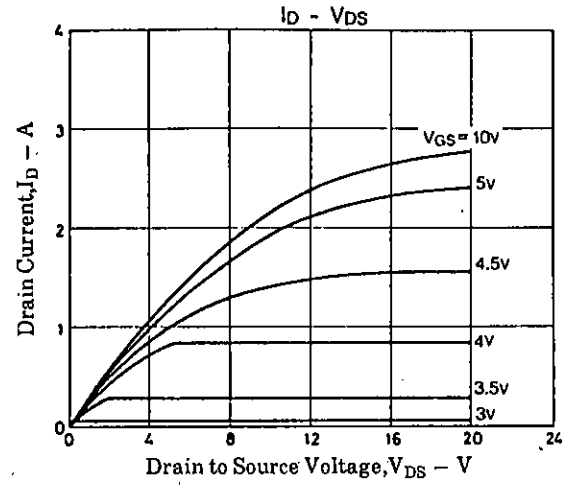
ID - VDS
Drain Current,ID – A
Drain to Source Voltage,VDS – V
VGS=10V
5v
4.5v
4V
3.5v
3v

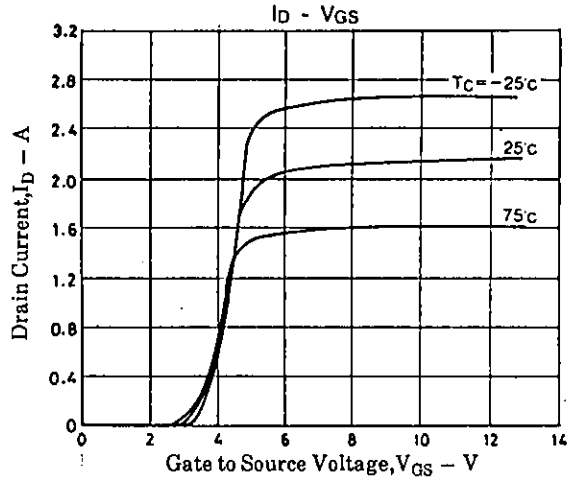
ID - VGS
Drain Current,ID – A
Gate to Source Voltage,VGS – V
Tc=-25°c
25°c
75°c

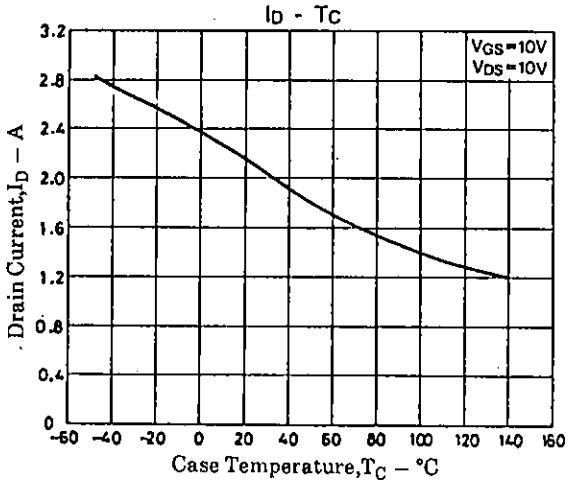
ID - Tc
Drain Current,ID – A
Case Temperature,TC – °C
VGS=10V
VDS=10V

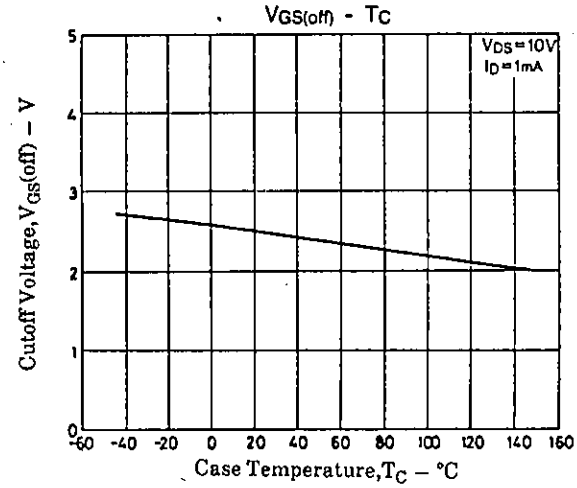
VGS(off) - Tc
Cutoff Voltage,VGS(off) – V
Case Temperature,TC – °C
VDS=10V
ID=1mA

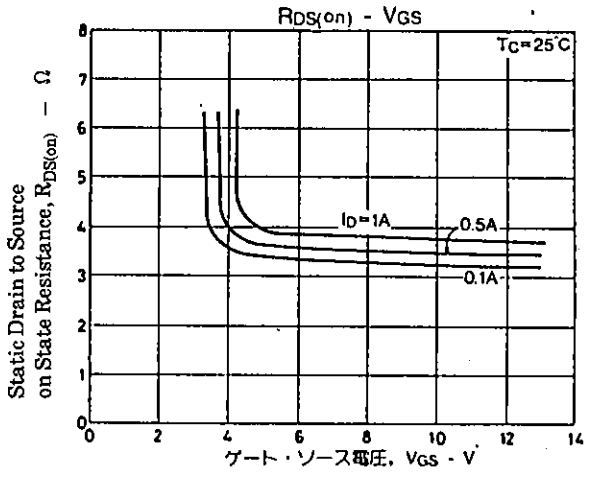
RDS(on) - VGS
Static Drain to Source on State Resistance, RDS(on) – Ω
ゲート・ソース電圧, VGS - V
Tc=25°C
ID=1A
0.5A
0.1A

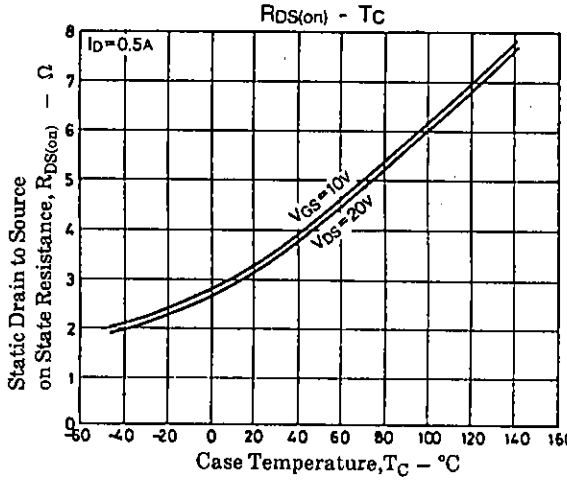
RDS(on) - Tc
Static Drain to Source on State Resistance, RDS(on) – Ω
Case Temperature,TC – °C
ID=0.5A
VGS=10V
VGS=20V

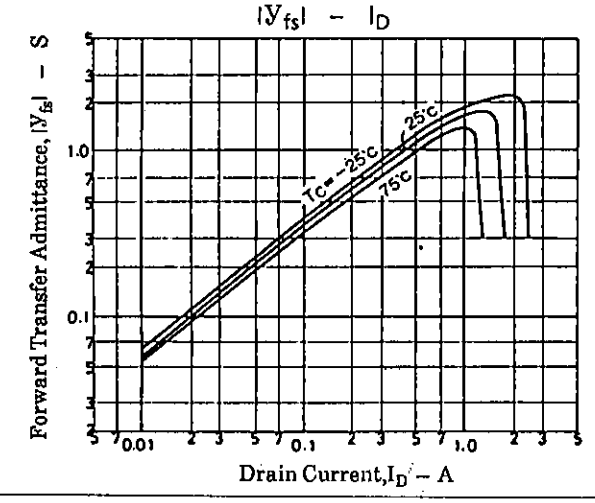
|Yfs| – ID
Forward Transfer Admittance, |Yfs| – S
Drain Current,ID – A
Tc=-25°c
25°c
75°c

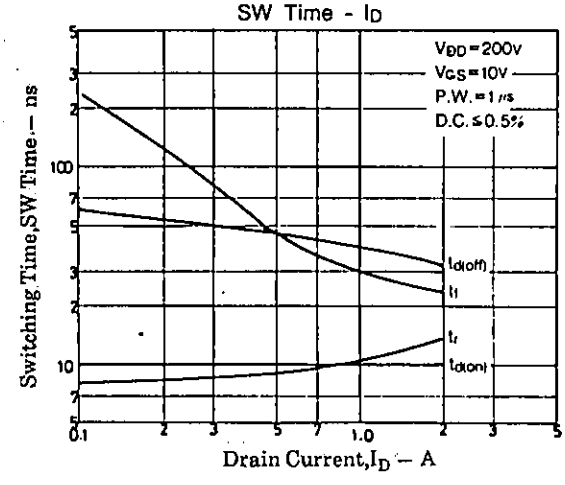
SW Time - ID
Switching Time,SW Time – ns
Drain Current,ID – A
VDD=200V
VGS=10V
P.W.=1μs
D.C.≤0.5%
td(off)
tf
tr
td(on)

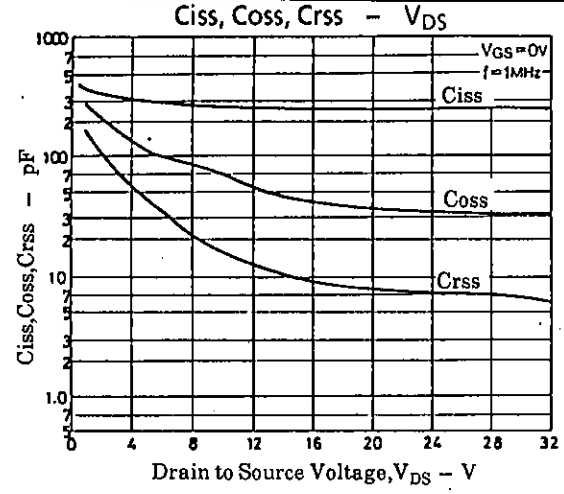

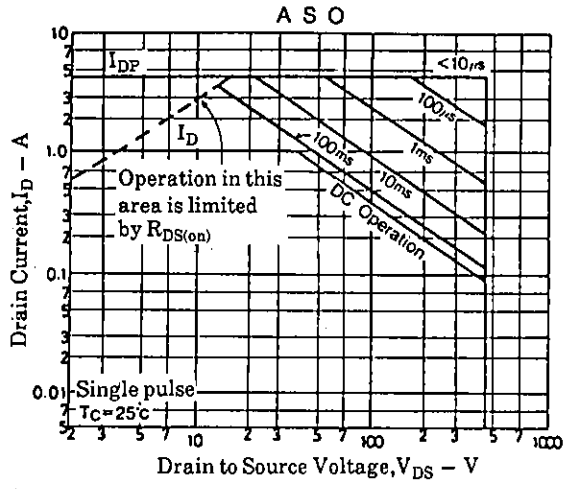

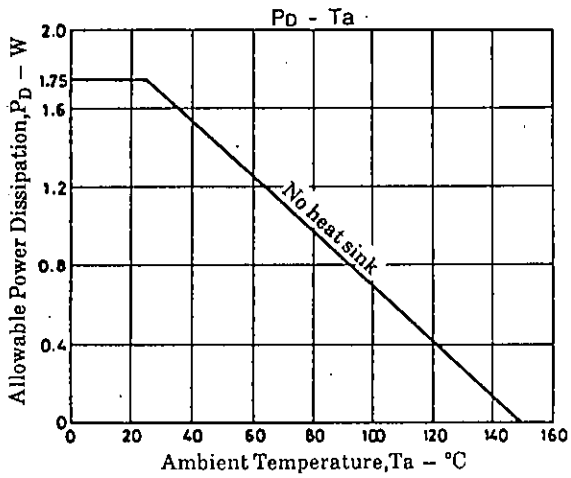

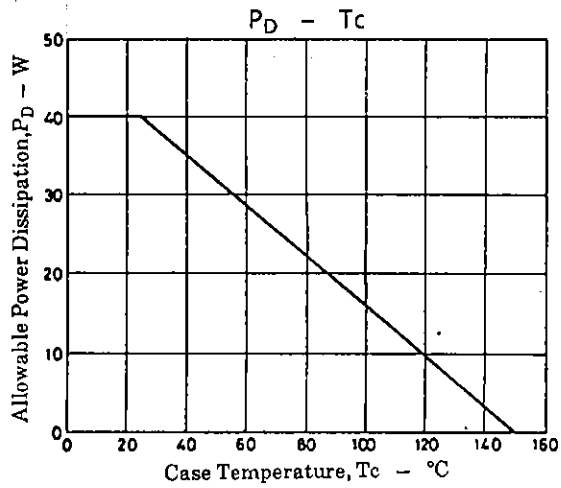

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.